

nichicon
MUSE F95

FRAMELESS™



For SMD




Smaller

For High
Frequency

For Audio Use

Conformal coated Chip, For Mobile Audio

- Compliant to the RoHS directive (2002/95/EC).

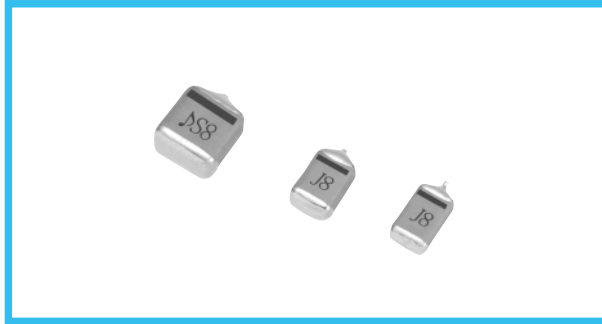


Applications

- Mobile Audio Player
- Smartphone
- Mobile phone
- Wireless Microphone System



Feature

- Rich sound in the bass register and clear sound. Materials are strictly selected to achieve high level sound. F95 series has no lead-frame, and no vibration factor.
- Low ESR, Low ESL
- Line up miniature size and high capacitance, necessary to mobile design.

Type numbering system (Example : 4V 220μF)

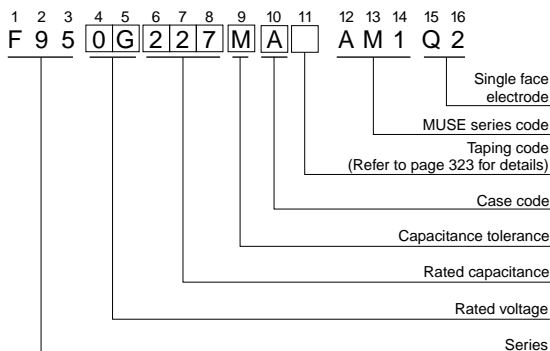


Specifications

| Item | Performance Characteristics |
|-----------------------------------|---|
| Category | |
| Temperature Range | -55 to +125°C (Rated temperature : +85°C) |
| Capacitance Tolerance | ±20% (at 120Hz) |
| Dissipation Factor (at 120Hz) | Refer to next page |
| ESR(100kHz) | Refer to next page |
| Leakage Current | Refer to next page Provided that <ul style="list-style-type: none"> After 1 minute's application of rated voltage, leakage current at 85°C, 10 times or less than 20°C specified value. After 1 minute's application of rated voltage, leakage current at 125°C, 12.5 times or less than 20°C specified value. |
| Capacitance Change by Temperature | +15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C) |
| Damp Heat (Steady State) | At 40°C, 90 to 95% R.H., For 500 hours (No voltage applied) Capacitance Change Refer to next page (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Temperature Cycles | At -55°C / +125°C, 30 minutes each, For 5 cycles, Capacitance Change Refer to next page (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Resistance to Soldering Heat | 10 seconds reflow at 260°C, 10 seconds immersion at 260°C Capacitance Change Refer to next page (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Surge* | After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below. Capacitance Change Refer to next page (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Endurance* | After 2000 hours' application of rated voltage at 85°C, capacitors meet the characteristic requirements listed below. Capacitance Change Refer to next page (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Shear Test | After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.  |
| Terminal Strength | Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.  |

* As for the surge voltage, refer to page 322 for details.

Drawing

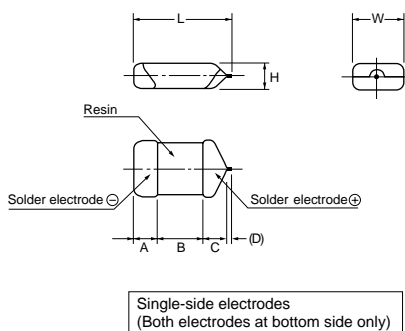

Dimensions

| Case code | L | W | H | A | B | C | (D) |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-------|
| S | 3.2 ± 0.3 | 1.6 ± 0.3 | 1.0 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| A | 3.2 ± 0.3 | 1.7 ± 0.3 | 1.4 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| T | 3.5 ± 0.2 | 2.7 ± 0.2 | 1.0 ± 0.2 | 0.8 ± 0.2 | 1.2 ± 0.2 | 1.1 ± 0.2 | (0.2) |
| B | 3.5 ± 0.2 | 2.8 ± 0.2 | 1.8 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 1.1 ± 0.3 | (0.2) |

D dimension only for reference

MUSE F95


■ Standard Ratings

| Cap. (μF) | V | 4 | 6.3 | 10 |
|--------------|------|-----------------|---------------|----|
| | Code | 0G | 0J | 1A |
| 68 | 686 | S | S • A | B |
| 100 | 107 | S | S • A • T | B |
| 150 | 157 | S | (A) | |
| 220 | 227 | (P) • S • A • T | (A) • (T) • B | |
| 330 | 337 | T • B | B | |
| 470 | 477 | (T) • B | (B) | |
| 680 | 687 | (T) • (B) | | |

() The series in parentheses are being developed.

Please contact to your local Nichicon sales office when these series are being designed in your application.

■ Marking



Rated Capacitance code

| μF | 68 | 100 | 150 | 220 | 330 | 470 | 680 |
|------|----|-----|-----|-----|-----|-----|-----|
| code | W7 | A8 | E8 | J8 | N8 | S8 | W8 |

P case - No marking on part.

■ Standard Ratings

| Rated Volt | Rated Capacitance (μF) | Case code | Part Number | *2 Leakage Current (μA) | Dissipation Factor (%@ 120Hz) | ESR (Ω@100kHz) | *1 ΔC/C (%) |
|------------|------------------------|-----------|------------------|-------------------------|-------------------------------|----------------|-------------|
| 4V | 68 | S | F950G686MSAAM1Q2 | 2.7 | 10 | 0.8 | * |
| | 100 | S | F950G107MSAAM1Q2 | 4.0 | 14 | 0.8 | * |
| | 150 | S | F950G157MSAAM1Q2 | 6.0 | 22 | 0.8 | ± 15 |
| | 220 | S | F950G227MSAAM1Q2 | 8.8 | 30 | 0.8 | ± 15 |
| | 220 | A | F950G227MAAAM1Q2 | 8.8 | 25 | 0.8 | ± 15 |
| | 220 | T | F950G227MTAAM1Q2 | 8.8 | 25 | 0.6 | * |
| | 330 | T | F950G337MTAAM1Q2 | 13.2 | 40 | 0.8 | ± 20 |
| | 330 | B | F950G337MBAAM1Q2 | 13.2 | 30 | 0.5 | ± 15 |
| | 470 | B | F950G477MBAAM1Q2 | 18.8 | 40 | 0.4 | ± 20 |
| 6.3V | 68 | S | F950J686MSAAM1Q2 | 4.3 | 14 | 0.9 | * |
| | 68 | A | F950J686MAAAM1Q2 | 4.3 | 12 | 0.5 | * |
| | 100 | S | F950J107MSAAM1Q2 | 6.3 | 20 | 0.9 | ± 15 |
| | 100 | A | F950J107MAAAM1Q2 | 6.3 | 14 | 0.5 | * |
| | 100 | T | F950J107MTAAM1Q2 | 6.3 | 14 | 0.6 | * |
| | 220 | B | F950J227MBAAM1Q2 | 13.9 | 30 | 0.4 | * |
| | 330 | B | F950J337MBAAM1Q2 | 20.8 | 35 | 0.6 | ± 20 |
| 10V | 68 | B | F951A686MBAAM1Q2 | 6.8 | 12 | 0.4 | * |
| | 100 | B | F951A107MBAAM1Q2 | 10.0 | 14 | 0.4 | * |

*1 : ΔC/C Marked "**"

| Item | S • A • T • B Case (%) |
|---------------------------|------------------------|
| Damp Heat | ±10 |
| Temperature cycles | ±5 |
| Resistance soldering heat | ±5 |
| Surge | ±5 |
| Endurance | ±10 |

*2 : Leakage Current

After 1 minute's application of rated voltage, leakage current at 20°C.